

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
30 June 2005 (30.06.2005)

PCT

(10) International Publication Number  
**WO 2005/059912 A1**

(51) International Patent Classification<sup>7</sup>: **G11B 20/00**,  
H04H 1/00

(74) Agent: **HARTNACK, Wolfgang**; Deutsche Thom-  
son-Brandt GmbH, European Patent Operations,  
Karl-Wiechert-Allee 74, 30625 Hannover (DE).

(21) International Application Number:  
PCT/EP2004/010221

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(22) International Filing Date:  
13 September 2004 (13.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
03090430.4 11 December 2003 (11.12.2003) EP

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,  
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **THOM-  
SON LICENSING S.A.** [FR/FR]; 46 Quai A. le Gallo,  
92100 Boulogne-Billancourt (FR).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **BAUM, Peter**,  
**Georg** [DE/DE]; Am Gutspark 32, 30539 Hannover (DE).  
**VOESSING, Walter** [DE/DE]; Remarqueweg 23, 30455  
Hannover (DE).

Published:  
— with international search report

[Continued on next page]

(54) Title: METHOD AND APPARATUS FOR TRANSMITTING WATERMARK DATA BITS USING A SPREAD SPECTRUM,  
AND FOR REGAINING WATERMARK DATA BITS EMBEDDED IN A SPREAD SPECTRUM

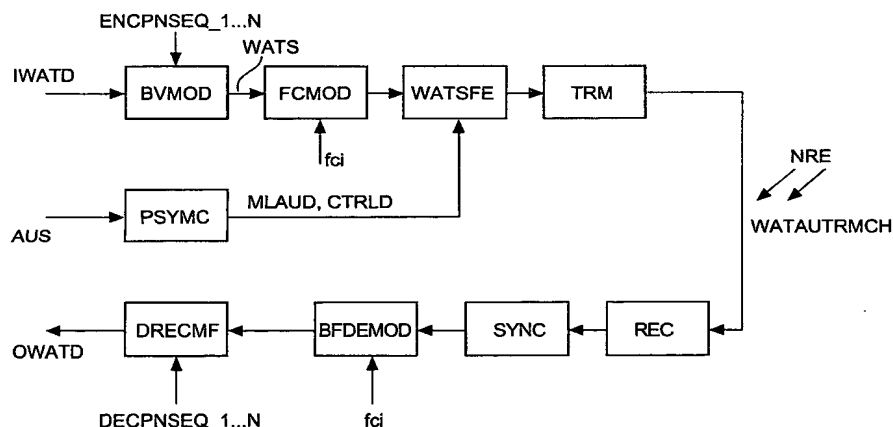

(57) Abstract: Spread spectrum technology and the related inserted or added information signal can be used for implementing wa-  
termarking digital audio signals. A known processing for retrieving at receiver or decoder side the watermark signal information bit  
from the spread spectrum is convolving the received or replayed spectrum with a spreading function that is time-inverse with respect  
to the original spreading function. The pseudo noise sequences are modulated one or more carrier frequencies which are inserted  
at one or more frequency bands into the spectrum of an audio signal. The watermark signal decoder checks the frequency bands  
occupied by such carriers. According to the invention, the frequency band oc-cupation information is signalled in advance, i.e. is  
trans-mitted already together with the frame data for the current frame, such that the watermark signal decoder knows before pro-  
cessing the following audio signal frame which carrier frequency or frequencies are occupied and must be used for the corresponding  
carrier demodulation, and which carrier frequencies need not be checked and demodulated.

WO 2005/059912 A1



*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*